


# T3100 Quick Tips & Maintenance - Service Visit

“3 Things to Check” -  
better off today than  
yesterday


(Inspect machine from the upright  
position)

# “3 Things” - Weekly Drive Belt Inspection (for 2015 - 2021 models)

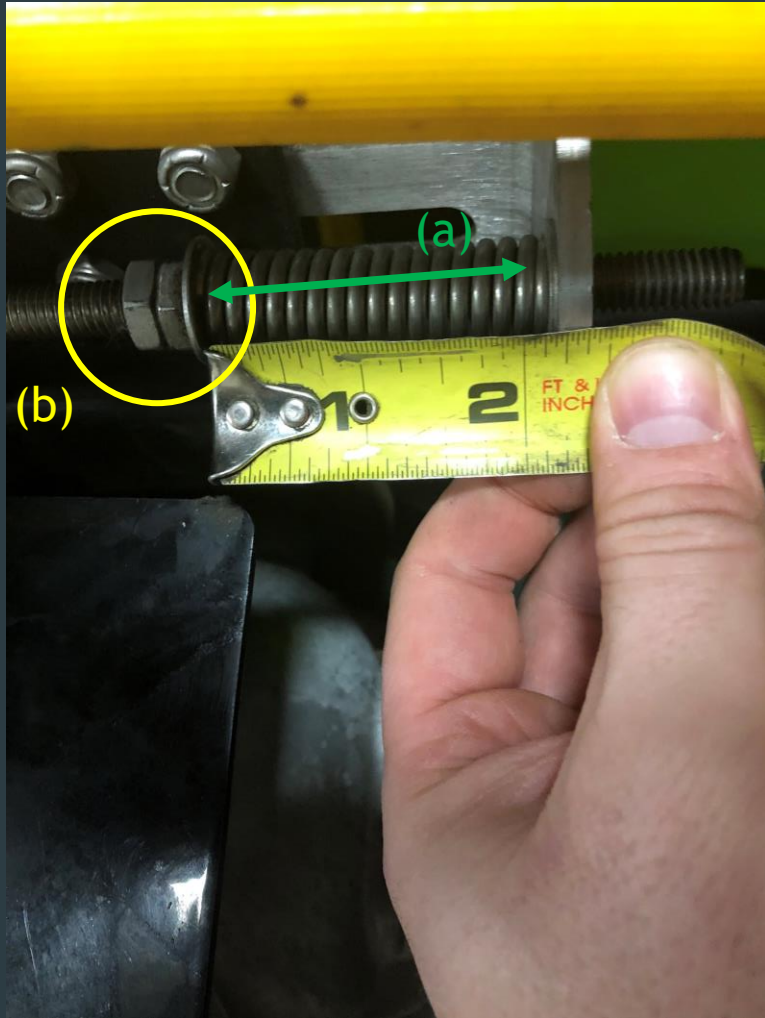

1. Apply tape measure to spring - measure distance from washer to washer on spring. Measurement should be at 2 1/4". Figure (a)
2. Apply blue Loctite to threads before tightening jam nut. Figure (b)
3. This should be check weekly

# “3 Things” - Weekly Drive Belt Inspection (for 2022 & newer models)

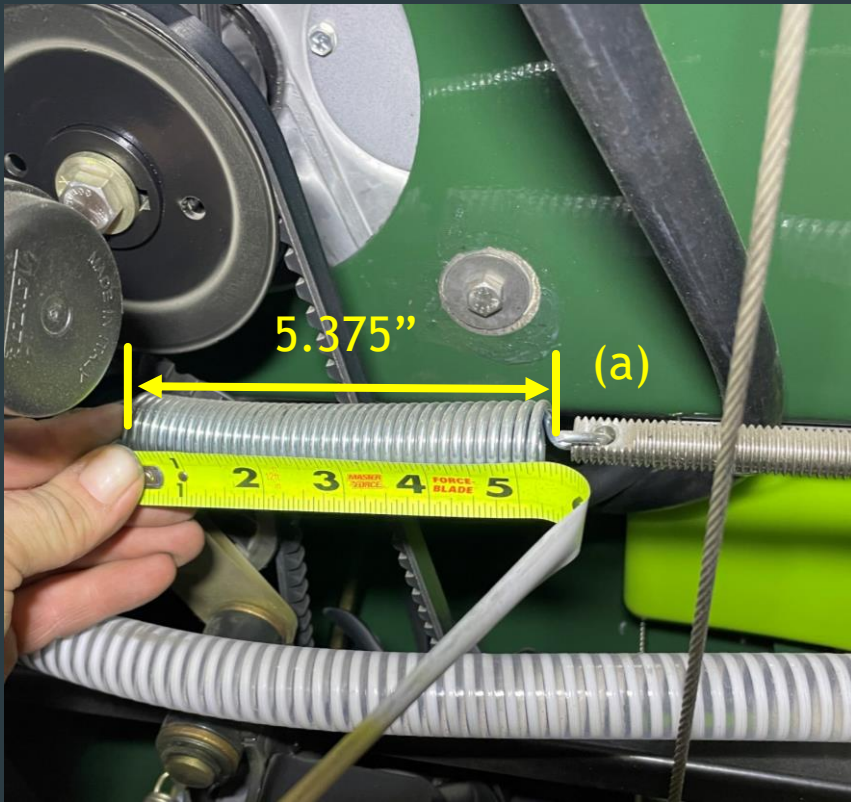

1. Apply tape measure to spring - measure the spring length. Measurement should be at 5.375". Figure (a) When tightening avoid twisting the spring.
2. This should be checked weekly

# “3 Things” - Weekly Pump Belt Inspection (STEP 1)



1. While pushing on pump belt from 1 side (do not push extremely hard) measure inside distance. This distance should be no less than 1 ½”.
2. If pump belt is less than 1 ½” continue to step 2

# “3 Things” - Weekly Pump Belt Inspection (STEP 2)



3. To adjust pump belt - loosen nylock nuts on pump assembly
4. Adjust pump assembly up and tighten. Measure distance again to ensure greater than 1 ½"
5. Repeat until belt is measure correct



# “3 Things” - Weekly Steering Cable Inspection



Step 1: Apply tape measure as see in picture to left

# “3 Things” - Weekly Steering Cable Inspection



Step 2: Push steering cable towards frame to take measurement

Measurement should be no more than a 1 ½'. If measurement is greater than a 1 ½' then proceed to step 3



# “3 Things” - Weekly Steering Cable Inspection



Step 3: Refer to steering cable adjustment quick tip.